

# We could tell you why your starter failed, but we thought you might like to see for yourself.

**If left unchecked, these problems will result in premature starter failure REGARDLESS of the STARTER MANUFACTURER.**



Although the outside of the starter (at bottom right) looks fine, the flywheel picked up water from the bilge and pumped it inside the starter causing the corrosion shown here.

**WATER INTRUSION IS THE #1 CAUSE OF STARTER FAILURE.** If water gets pumped into the motor portion of the starter from the flywheel, it will not drain out. As you can see, rust and corrosion will destroy the inside components of the starter.




Shown here are damaged starter mounting pads. Water ingested into the engine stresses the mounting bolts beyond normal conditions. The bolts stretch and cause the starter to become loose. This could eventually lead to damage to the ring gear, starter casting and possibly the entire engine block.

**THE #2 CAUSE OF STARTER FAILURE IS WATER INGESTED INTO THE ENGINE.** Leaking exhaust manifolds, gaskets and risers are often the source. Damage to the mounting pads, as shown above, indicate the starter has been loose on the engine; possibly caused by water ingestion into the cylinder. Although the engine may not experience a complete hydro lock, if enough water is on top of the piston to raise the compression to a high level, the starter bolts and mounting pads will be stressed beyond normal load conditions.

**DON'T BE FOOLED BY OUTWARD APPEARANCES.** As shown here, the outside condition of the starter appears to be fine, but by removing and inspecting the lower starter case bolt, it is obvious water has gotten inside the starter.

**These problems are not the fault of the starter. Simply replacing the starter without first locating and correcting the source of water intrusion will only result in more starter failures.**

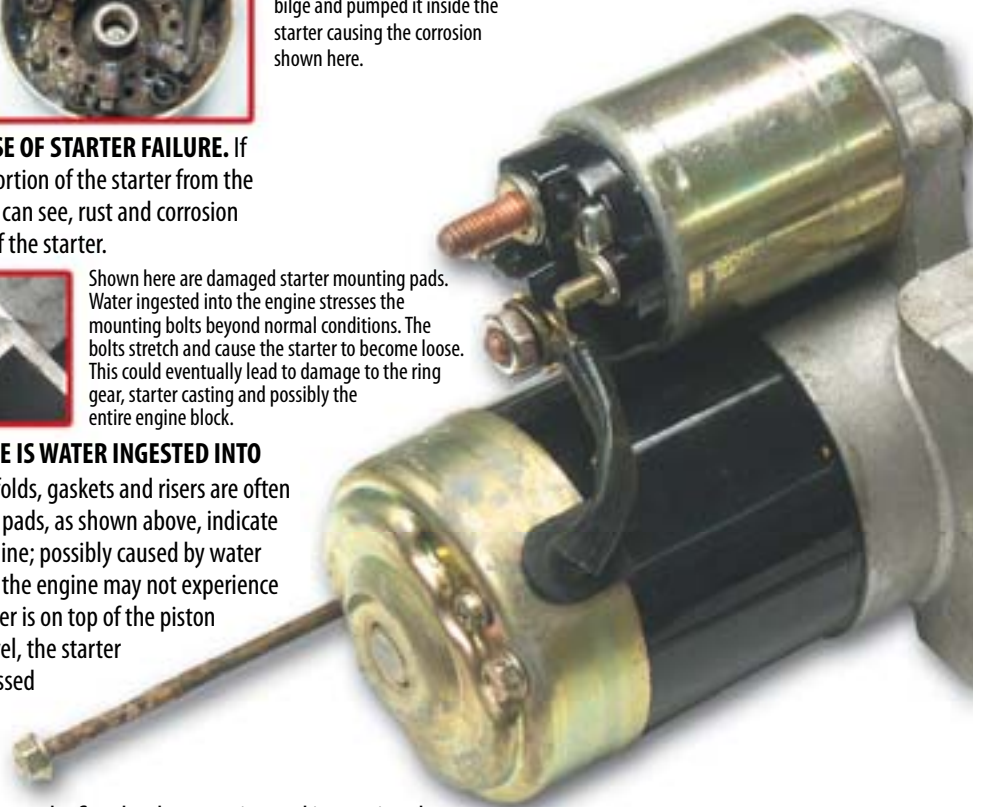

**Questions?**

**In need of a replacement starter?**



**Give us a call.**



*Tech Tip*

*These types of damage are NOT COVERED BY WARRANTY*

# How To Determine The Correct Starter Rotation

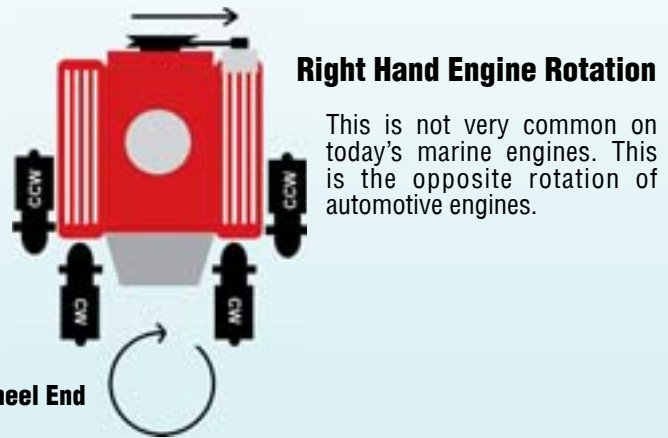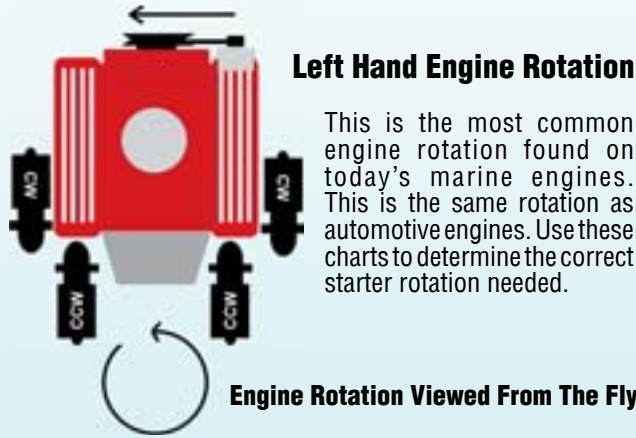

Another way to determine the starter rotation is to inspect the chamfer on the starter drive gear. The bevel will always be on the trailing edge.



**Clockwise Rotation**



**Counter Clockwise Rotation**

## Important Check Points



**Worn Out Battery**  
Batteries cause more trouble than any other component in a marine electrical system.

**Always make sure the battery is completely charged and load tested before replacing other components.**



**Loose Connections**  
Be sure to check all the terminals and connections and make sure they are clean and tight.


## Important Check Points



**High Resistance**  
This is a very common problem found in marine electrical systems. Corrosion, undersized wire, or bad connections will cause low voltage to the electrical components. Low voltage causes high heat and will destroy electrical devices. Be sure to check for voltage drops.



**Incorrect Wiring**  
Incorrect wiring can cause burnouts. Always tag the wires when removing an electrical component. **If you are not sure how to connect the wires call our technical department toll free at 800-722-2720.**




**Loose Battery Clamps**  
Cable terminals must be tight. If the ends of the clamps touch at the top, disconnect the cable clamps and shave the ends of the clamp jaws with a file so there is a gap.

## DRIVE GEARS


### DID YOU KNOW...

**Did you know the gear profile for the 9-tooth O.E.M. gear reduction starter and the 11-tooth ARCO High Performance gear reduction starter are the same?** The only difference is the diameter of the drive gear. Since the 11-tooth drive gear has two more teeth it is naturally larger in diameter. To compensate for its smaller diameter, the center of the 9-tooth drive gear is located closer to the flywheel. Both starters are thus completely interchangeable. These are powerful starters and we are able to take advantage of a better gear ratio using this 11-tooth gear.

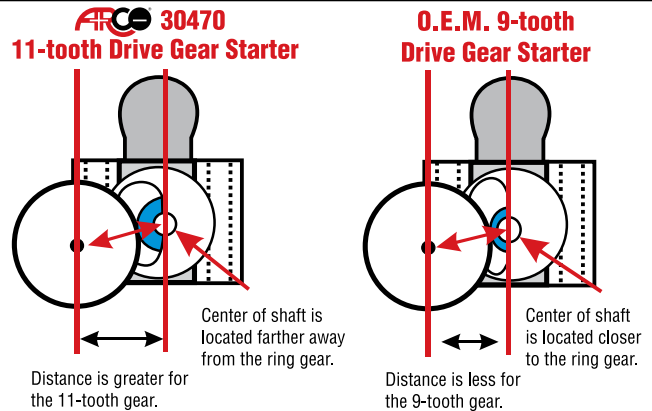

### INERTIA DRIVES GEARS

As shown here, spinning the drive with a wire wheel in the direction it clicks will disengage the locks.

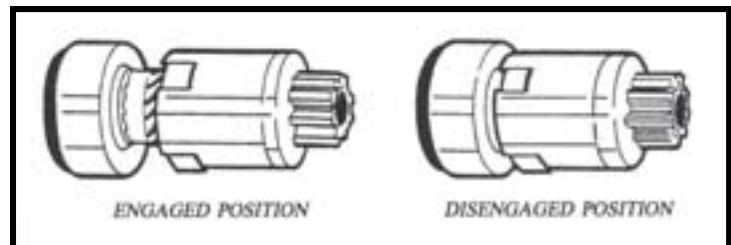

### Do not condemn a drive until it has been tried in actual operation and proven faulty.

The Folo-Thru type drive currently used on many starting motors has brought about difficulty due to a misunderstanding of operating and lack of information on proper servicing. This fact has been reflected by the number of drives returned for warranty which are fully operative.

The Folo-Thru drive is designed to lock and remain in the extended or engaged position until the engine starts and reaches approximately 400 to 500 RPM. The drive to flywheel rotation is fifteen to one. When the engine is turning at 400 RPM, the starter drive gear is turning 6,000 RPM. If the drive is locked in the extended position it has to be reinstalled on the engine and the engine started or the drive must be turned in excess of 6,000 RPM by a wire wheel mounted on an electric bench grinder to make it disengage.

The reason the pinion locks in the engaged position is to assure the starter continues to crank until the engine has started, thus preventing false starts. This is accomplished by using a spring loaded pin which rides on one of the pinion screw threads and drops into a hole when the pinion is in the fully engaged position. This locks the pinion in the engaged position. When the engine starts, the flywheel of the engine drives the starter pinion. A clutch mechanism is built into the pinion to protect the starter from excessive RPM.

The clutch allows the pinion to turn faster or overrun the armature shaft. When the engine reaches 400-500 RPM, the pinion spins fast enough to create the needed centrifugal force to throw the spring loaded pin out of the hole in the shaft and allow the pinion to disengage.